
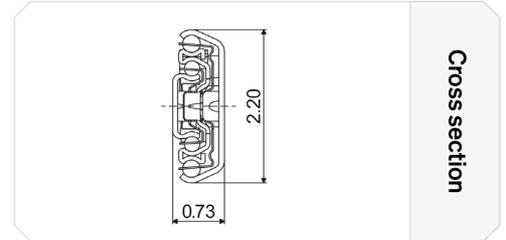


Telescopic slides
for a world in motion.

TR-5618 ULF HD F

- Full extension slide - Loads up to 717 lbs
- Slide profiles: Steel, zinQroteQ
- Ball cage: Steel, galvanized
- Sequence device: Plastic / Elastomer
- Bearings: Hardened carbon steel
- Rubber stop: Plastic / Elastomer
- Operating temperature: -20 to 80 degrees Celsius

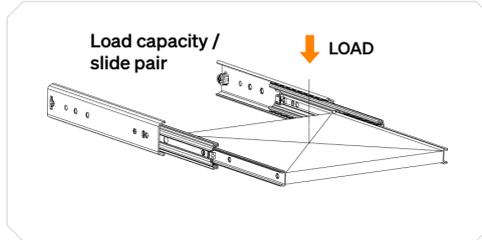

Cross section

Specifications

Fixation [Cabinet side]	Fixation [Drawer side]	Screw Head	Load capacity [lbs]	Height [in]	Width [in]
Metal ASME B18.3 No. 8 DIN 7500-M - DIN 965 / ISO 7046 - M5	Metal ASME B18.3 No. 6 DIN 7500-M - DIN 965 / ISO 7046 - M5	Metal Countersunk 0.13"	207 - 284	2.2	0.73
Wood Imperial 8g DIN 7977 5.0 mm	Wood Imperial 6 g DIN 7977 4.0/4.5 mm	Wood Countersunk 0.10"			


Technical information

Article no.	Length [in]	Travel [in]	Load capacity [lbs]
M12AB3	11.81	11.22	207
M12AB4	13.78	13.78	212
M12AB5	15.75	15.75	214
M12AB6	17.72	17.72	243
M12AB7	19.69	19.69	262
M12AB8	21.65	21.65	260
M12AB9	23.62	23.62	271
M12AC0	27.56	27.56	284
M12AC1	31.5	31.5	267

Features & Fixations


	Feature Pull-in	Automatically pulls the drawer fully closed once it nears the end
	Fixation Click bracket	The click bracket enables quick, tool-free, secure mounting
	Fixation Countersunk holes	Countersunk holes ensure screws sit flush and avoid surface contact

Hole pattern [in] [Cabinet Side]

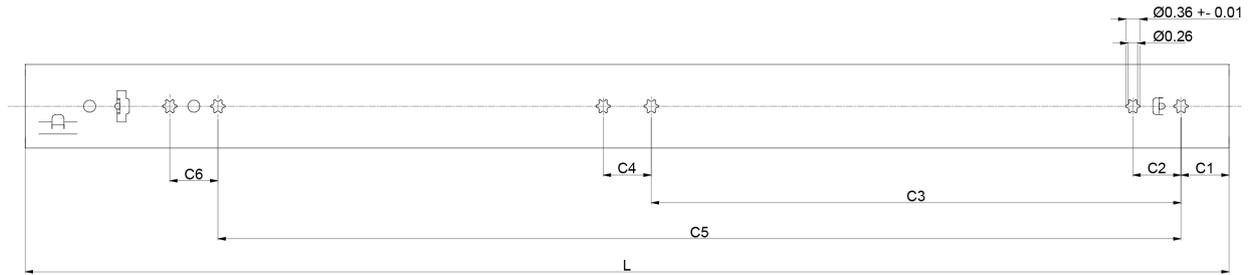

Article no.	L	C1	C2	C3	C4	C5	C6
M12AB3	11.81	1.26	1.26	6.3	1.26	/	/
M12AB4	13.78	1.26	1.26	6.3	1.26	/	/
M12AB5	15.75	1.26	1.26	7.56	1.26	/	/
M12AB6	17.72	1.26	1.26	10.08	1.26	/	/
M12AB7	19.69	1.26	1.26	11.34	1.26	/	/
M12AB8	21.65	1.26	1.26	12.6	1.26	/	/
M12AB9	23.62	1.26	1.26	15.12	1.26	/	/
M12AC0	27.56	1.26	1.26	16.38	1.26	/	/
M12AC1	31.5	1.26	1.26	13.86	1.26	25.2	1.26

Hole pattern [in] [Drawer Side]

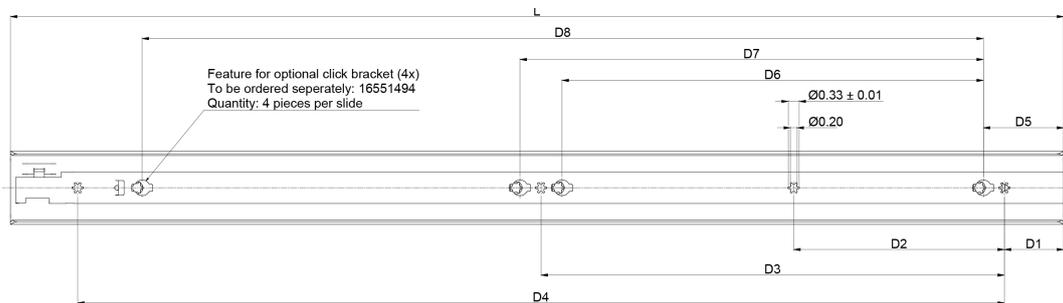

Article no.	L	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10
M12AB3	11.81	1.77	3.78	7.56	/	1.14	3.78	5.04	6.73	/	/
M12AB4	13.78	1.77	5.04	10.08	/	2.4	3.78	5.04	7.44	/	/
M12AB5	15.75	1.77	5.04	11.34	/	2.4	3.78	5.04	9.41	/	/
M12AB6	17.72	1.77	6.3	13.86	/	2.4	5.04	6.3	11.38	/	/
M12AB7	19.69	1.77	7.56	16.38	/	2.4	6.3	7.56	13.35	/	/
M12AB8	21.65	1.77	8.82	17.64	/	2.4	7.56	8.82	15.31	/	/
M12AB9	23.62	1.77	5.04	10.08	20.16	2.4	8.82	10.08	17.28	/	/
M12AC0	27.56	1.77	5.04	11.34	23.94	2.4	10.08	11.34	21.22	/	/
M12AC1	31.5	1.77	6.3	13.86	27.72	2.4	12.6	13.86	25.16	/	/