
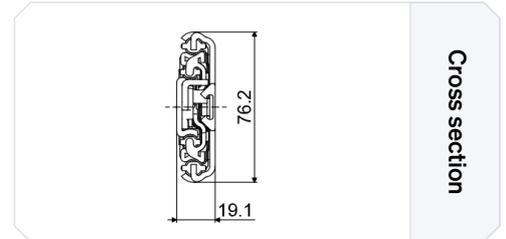


Telescopic slides  
for a world in motion.

## TR - 7619 JUMBO

- Full extension slide - Loads up to 325 kg
- Slide profiles: Steel, zinQproteQ
- Ball cage: Polymer
- Sequence device: Plastic / Elastomer
- Bearings: Hardened carbon steel
- Rubber stop: Plastic / Elastomer
- Operating temperature: -20 to 80 degrees Celsius

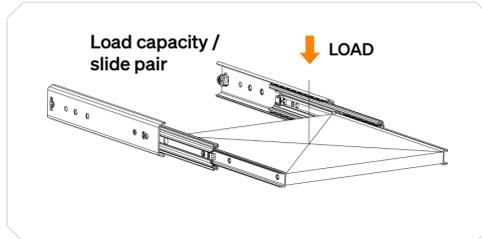


### Specifications

Fixation [Cabinet side]	Fixation [Drawer side]	Load capacity [kg]	Height [mm]	Width [mm]
<b>Meta1</b> M5 / DIN 7984 M5 / M6 / ISO 7380	<b>Meta1</b> M5 / DIN 7984 M5 / M6 / ISO 7380	225 - 325	76.2	19.1

### Technical information


Article no.	Lock-in*	Lock-out*	Front release	Length [mm]	Travel [mm]	Load capacity [kg]
M14AG1	M14AG2L/R	M14AG3	M14AG4L/R	300	298	225
M14AG5	M14AG6L/R	M14AG7	M14AG8L/R	350	366	235
M14AG9	M14AH0L/R	M14AH1	M14AH2L/R	400	398	250
M14AH3	M14AH4L/R	M14AH5	M14AH6L/R	450	464	255
M14AH7	M14AH8L/R	M14AH9	M14AI0L/R	500	512	260
M14AI1	M14AI2L/R	M14AI3	M14AI4L/R	550	562	265
M14AI5	M14AI6L/R	M14AI7	M14AI8L/R	600	610	275
M14AM1	M14AM2L/R	M14AM3	M14AM4L/R	650	660	285
M14AI9	M14AJ0L/R	M14AJ1	M14AJ2L/R	700	708	295
M14AM5	M14AM6L/R	M14AM7	M14AM8L/R	750	758	300
M14AJ3	M14AJ4L/R	M14AJ5	M14AJ6L/R	800	806	310
M14AK9	M14AL0L/R	M14AL1	M14AL2L/R	850	854	315
M14AJ7	M14AJ8L/R	M14AJ9	M14AK0L/R	900	904	320
M14AK1	M14AK2L/R	M14AK3	M14AK4L/R	1000	1000	325
M14AL3	M14AL4L/R	M14AL5	M14AL6L/R	1100	1098	305
M14AK5	M14AK6L/R	M14AK7	M14AK8L/R	1200	1212	295
M14AM9	M14AN0L/R	M14AN1	M14AN2L/R	1350	1358	245
M14AL7	M14AL8L/R	M14AL9	M14AM0L/R	1500	1504	225

- Add L behind the article number for 'lock-in' and 'front release' on the left side or add R behind the article number for 'lock-in' and 'front release' on the right side.

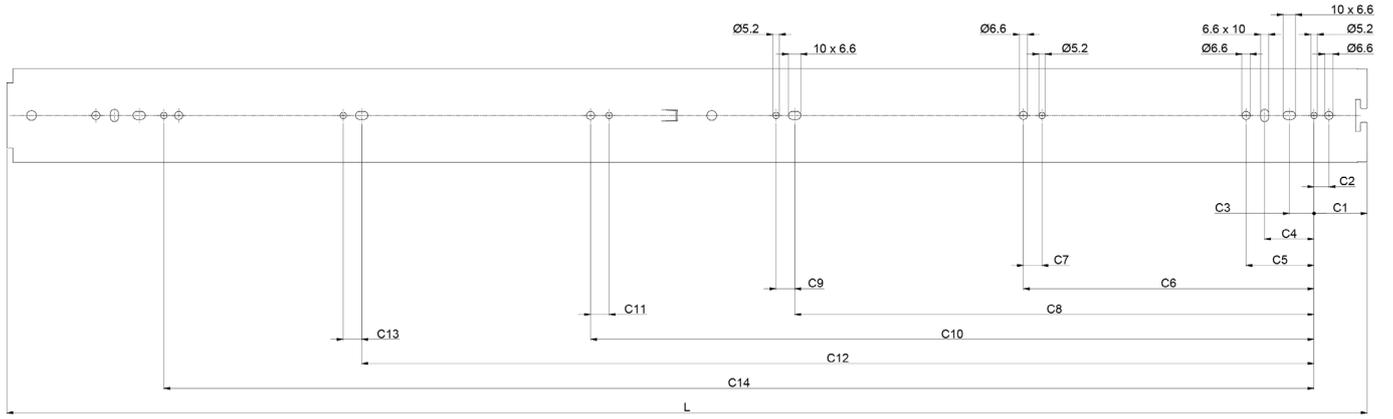


Article No.	L	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14
M14AG1	300	43	12	20	40	55	130	/	/	/	/	/	/	/	/
M14AG5	350	43	12	20	40	55	180	/	/	/	/	/	/	/	/
M14AG9	400	43	12	20	40	55	230	/	/	/	/	/	/	/	/
M14AH3	450	43	12	20	40	55	280	/	/	/	/	/	/	/	/
M14AH7	500	43	12	20	40	55	330	/	/	/	/	/	/	/	/
M14AI1	550	43	12	20	40	55	380	/	/	/	/	/	/	/	/
M14AI5	600	43	12	20	40	55	185	15	320	15	430	/	/	/	/
M14AM1	650	43	12	20	40	55	185	15	320	15	480	/	/	/	/
M14AI9	700	43	12	20	40	55	185	15	320	15	530	/	/	/	/
M14AM5	750	43	12	20	40	55	185	15	370	15	580	/	/	/	/
M14AJ3	800	43	12	20	40	55	285	15	420	15	630	/	/	/	/
M14AK9	850	43	12	20	40	55	285	15	420	15	680	/	/	/	/
M14AJ7	900	43	12	20	40	55	285	15	420	15	730	/	/	/	/
M14AK1	1000	43	12	20	40	55	385	15	520	15	830	/	/	/	/
M14AL3	1100	43	12	20	40	55	235	15	420	15	585	15	770	15	930
M14AK5	1200	43	12	20	40	55	285	15	420	15	685	15	820	15	1030
M14AM9	1350	43	12	20	40	55	285	15	420	15	785	15	920	15	1180
M14AL7	1500	43	12	20	40	55	385	15	520	15	885	15	1020	15	1330

## Hole pattern [mm] [Drawer Side]

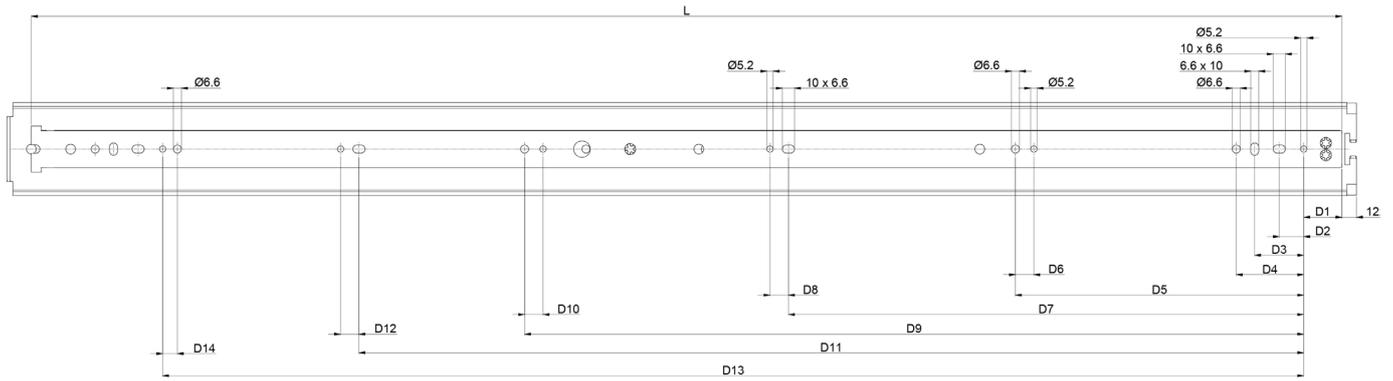


Article no.	L	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	D14
M14AG1	300	31	20	40	55	130	/	/	/	/	/	/	/	/	/
M14AG5	350	31	20	40	55	235	/	/	/	/	/	/	/	/	/
M14AG9	400	31	20	40	55	118	/	/	/	/	/	/	/	230	12
M14AH3	450	31	20	40	55	142	/	/	/	/	/	/	/	280	12
M14AH7	500	31	20	40	55	186	/	/	/	/	/	/	/	330	12
M14AI1	550	31	20	40	55	186	/	/	/	/	/	/	/	380	12
M14AI5	600	31	20	40	55	185	15	355	15	/	/	/	/	430	12
M14AM1	650	31	20	40	55	185	15	355	15	/	/	/	/	480	12
M14AI9	700	31	20	40	55	285	15	420	15	/	/	/	/	530	12
M14AM5	750	31	20	40	55	285	15	420	15	/	/	/	/	580	12
M14AJ3	800	31	20	40	55	285	15	455	15	/	/	/	/	630	12
M14AK9	850	31	20	40	55	335	15	520	15	/	/	/	/	680	12
M14AJ7	900	31	20	40	55	385	15	520	15	/	/	/	/	730	12
M14AK1	1000	31	20	40	55	385	15	555	15	/	/	/	/	830	12
M14AL3	1100	31	20	40	55	235	15	420	15	635	15	770	15	930	12
M14AK5	1200	31	20	40	55	285	15	420	15	685	15	820	15	1030	12
M14AM9	1350	31	20	40	55	285	15	455	15	785	15	920	15	1180	12
M14AL7	1500	31	20	40	55	385	15	520	15	885	15	1020	15	1330	12

## Features & Fixations




### Feature Lock-in

Keeps the drawer securely closed until manually released




### Feature Bumper without hold closed

To prevent the drawer from slamming shut and to absorb impacts as it closes.



### Feature Lock-out

Keeps the drawer fully extended until manually released



### Feature Front release

Locking and/or unlocking operated directly from the front for quick and easy access.



### Fixation Holes

To secure the slide to both the mounting surface or the cabinet and the drawer.