



Telescopic slides
for a world in motion.

TRA-5319DC STAINLESS

- Over extension slide - Loads up to 100 kg
- Slide profiles: Stainless steel
- Ball cage: Stainless steel
- Sequence device: Plastic / Elastomer
- Bearings: Stainless steel
- Rubber stop: Plastic / Elastomer
- Operating temperature: -20 to 80 degrees Celsius

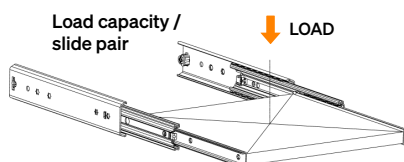

Cross section

Specifications

Fixation [Cabinet side]	Fixation [Drawer side]	Load capacity [kg]	Height [mm]	Width [mm]
Metal M5 / DIN 965 / ISO 7046 M5 / DIN 7500	Metal M5 / DIN 965 / ISO 7046 M5 / DIN 7500	70 - 100	53	19.1
Wood 5.0 / DIN 7997	Wood 5.0 / DIN 7997			

Technical information

Article no.	Length [mm]	Travel [mm]	Load capacity [kg]
13653S018	250	274	70
13653S028	300	325	75
13653S038	350	373.5	84
13653S048	400	425.5	89
13653S058	450	475	92
13653S068	500	523.5	95
13653S078	550	575	97
13653S088	600	625	97
13653S098	650	675	98
13653S108	700	750	100
13653S118	750	800	95
13653S128	800	850	90

Features & Fixations



Feature
Disconnect


Allows the drawer to be easily separated from its track, enabling quick and effortless removal or maintenance



Fixation
Hole


To secure the slide to both the mounting surface or the cabinet and the drawer

Hole pattern [mm] [Cabinet Side]

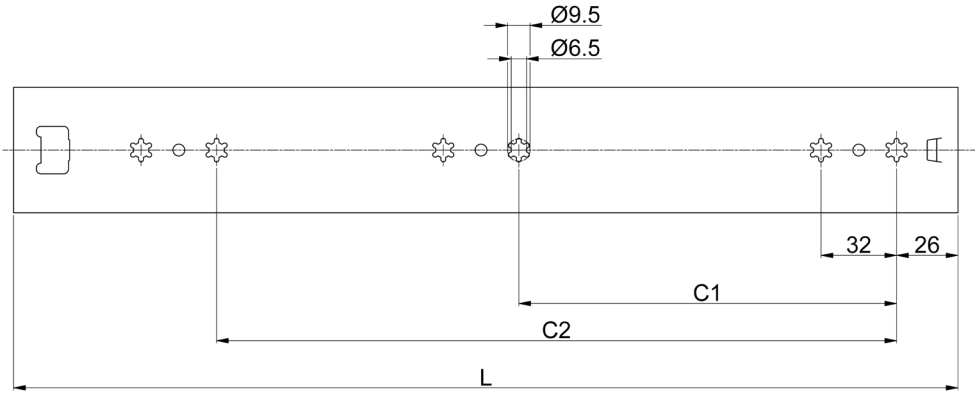

Article no.	L	C1	C2
13653S018	250	/	142
13653S028	300	/	192
13653S038	350	/	224
13653S048	400	160	288
13653S058	450	192	352
13653S068	500	192	384
13653S078	550	256	448
13653S088	600	256	480
13653S098	650	288	544
13653S108	700	288	576
13653S118	750	320	640
13653S128	800	352	672

Hole pattern [mm] [Drawer Side]

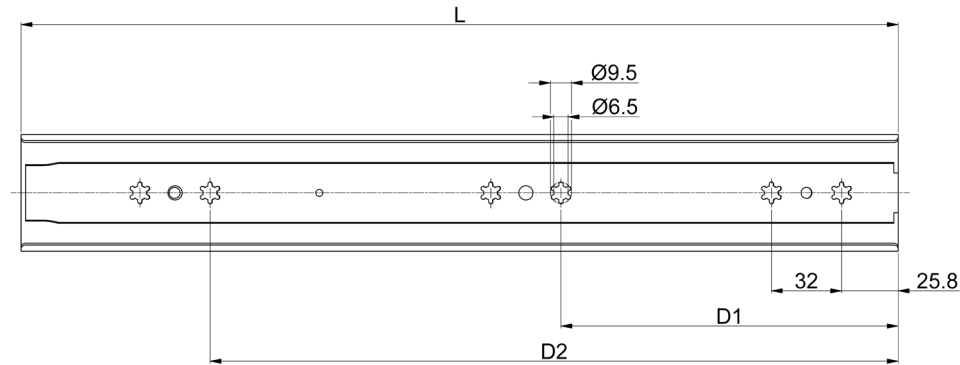

Article no.	L	D1	D2
13653S018	250	180	142
13653S028	300	/	192
13653S038	350	/	224
13653S048	400	128	288
13653S058	450	128	352
13653S068	500	160	384
13653S078	550	224	448
13653S088	600	224	480
13653S098	650	256	544
13653S108	700	288	576
13653S118	750	320	640
13653S128	800	320	672