
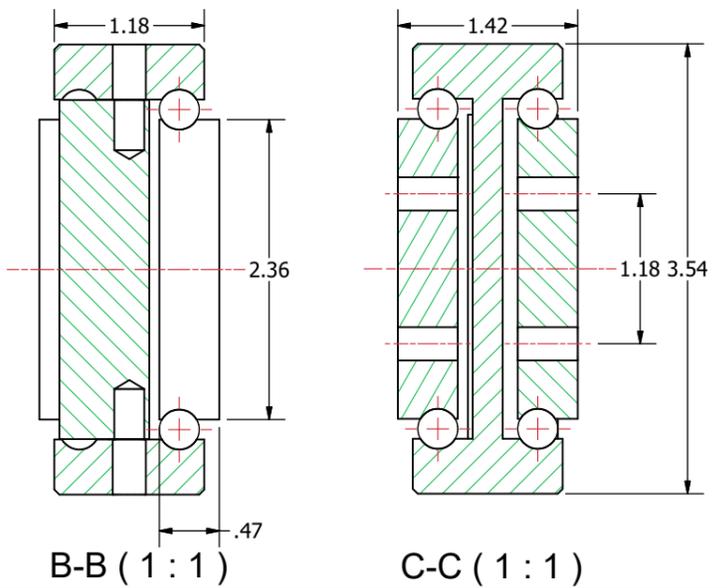


Slide number	Installation length L (inch)	Travel T (inch)	Load per pair (kg) steel	Dimension A	Dimension B	Dimension C
13890S03B	11,811	11,811	-	-	-	-
13890S04B	13,780	13,780	-	-	-	-
13890S05B	15,748	15,748	1125	1,969	-	7,874
13890S06B	17,717	17,717	1100	1,969	-	9,843
13890S07B	19,685	19,685	1080	1,969	-	11,811
13890S08B	21,654	21,654	1060	1,969	-	13,780
13890S09B	23,622	23,622	1050	1,969	-	15,748
13890S10B	25,591	25,591	1040	1,969	7,874	-
13890S11B	27,559	27,559	1025	1,969	8,858	-
13890S12B	29,528	29,528	1000	1,969	9,843	-
13890S13B	31,496	31,496	975	1,969	10,827	-
13890S14B	33,465	33,465	950	1,969	11,811	-
13890S15B	35,433	35,433	920	1,969	12,795	-
13890S16B	37,402	37,402	890	1,969	13,780	-
13890S17B	39,370	39,370	860	1,969	14,764	-
13890S18B	41,339	41,339	830	1,969	15,748	-
13890S19B	43,307	43,307	805	1,969	16,732	-
13890S20B	45,276	45,276	775	1,969	17,717	-
13890S21B	47,244	47,244	750	1,969	18,701	-

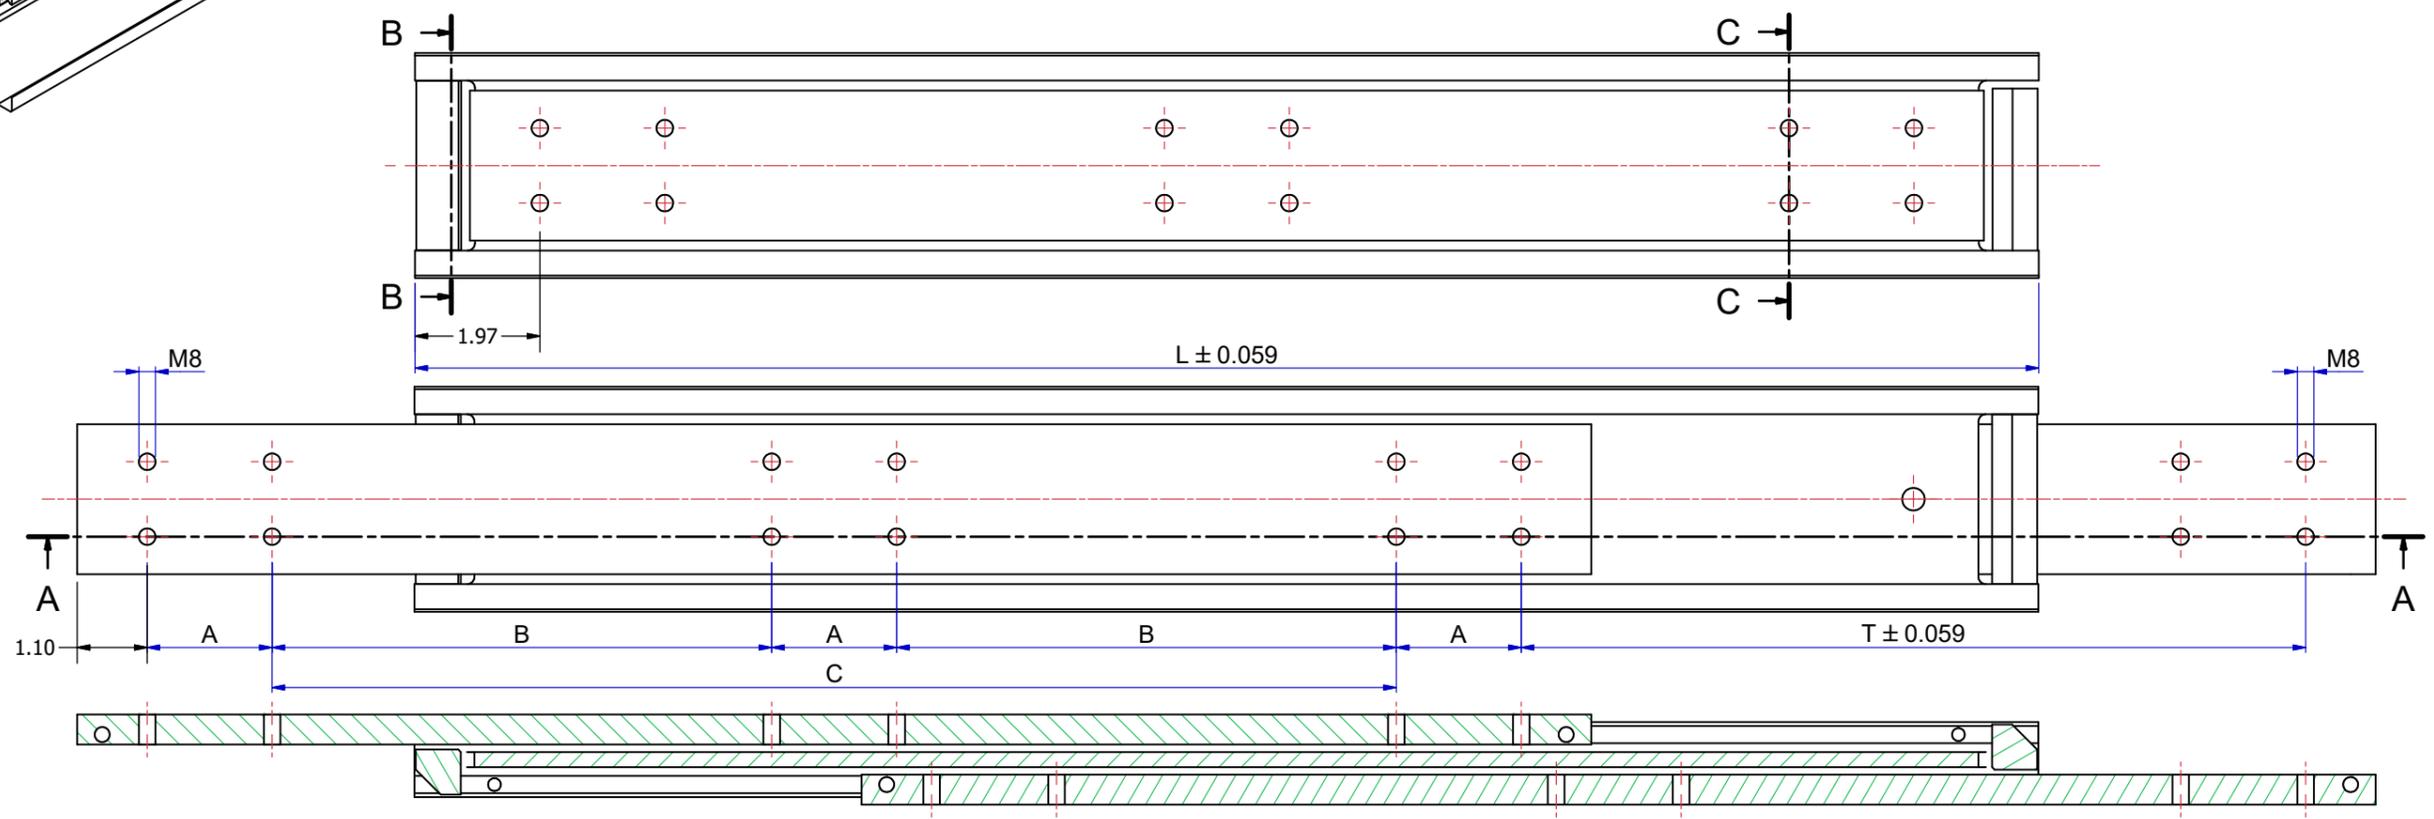

The load capacities are based on a 1% deflection test based on a simulation model (Finite Element Analysis). Load capacity in practice always depends on mounting use and other external factors that can influence this. Tolerance ±0,5mm measured from reference point.

DIMENSIONS ARE CALCULATED FROM METRIC VALUES
THOMAS REGOUT INT. BV. RESERVES THE RIGHT TO
ALTER NON-CUSTOMER SPECIFICATIONS WITHOUT NOTICE

Designer M. Urlings	Gen.Tol.Dim. ± 0.0197	Third angle projection	Material	
Date 19-4-2021	Gen.Tol.Angle ± 0.0197		Treatment	
Approver	Gen.Roughness Ra		Draw type Fabrication	Doc.No. E000147312
Date	Units inch/deg.		Scale 1 : 2	Type
Description SUPREME TR9036 - (36) BILEX				
Format A2			Item No. 13890SxxB	Revision 01
© THOMAS REGOUT INTERNATIONAL BV, Industrieweg 40, 6219 NR, Maastricht, The Netherlands, +31 (0)43 351 66 66 All rights are reserved.				

Rev	Date	Description	Designer
01	25-4-2023	REVISED MODEL AND TABLE.	R.G