
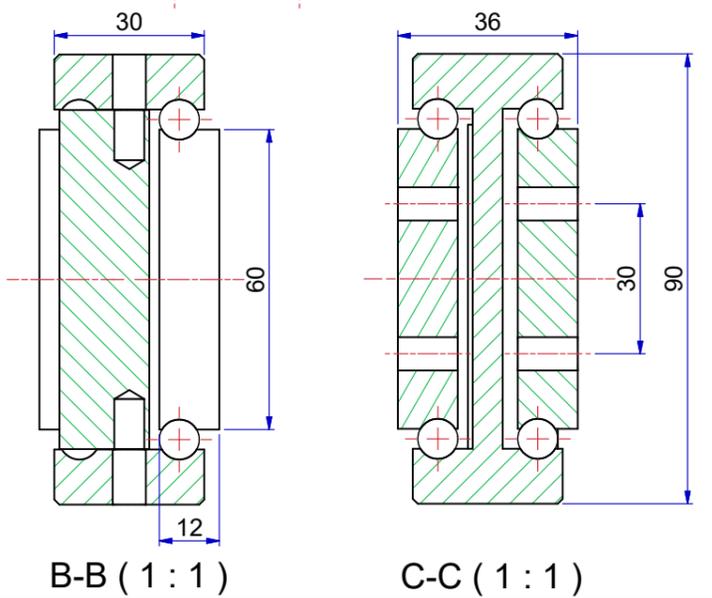


Slide number	Installation length L (mm)	Travel T (mm)	Load per pair (kg) steel	Dimension A	Dimension B	Dimension C
13890S03B	300	300	780	50	-	100
13890S04B	350	350	830	50	-	150
13890S05B	400	400	860	50	-	200
13890S06B	450	450	890	50	-	250
13890S07B	500	500	940	50	-	300
13890S08B	550	550	960	50	-	350
13890S09B	600	600	980	50	-	400
13890S10B	650	650	1000	50	200	-
13890S11B	700	700	1030	50	225	-
13890S12B	750	750	1040	50	250	-
13890S13B	800	800	1050	50	275	-
13890S14B	850	850	1045	50	300	-
13890S15B	900	900	1030	50	325	-
13890S16B	950	950	1015	50	350	-
13890S17B	1000	1000	995	50	375	-
13890S18B	1050	1050	980	50	400	-
13890S19B	1100	1100	950	50	425	-
13890S20B	1150	1150	920	50	450	-
13890S21B	1200	1200	900	50	475	-

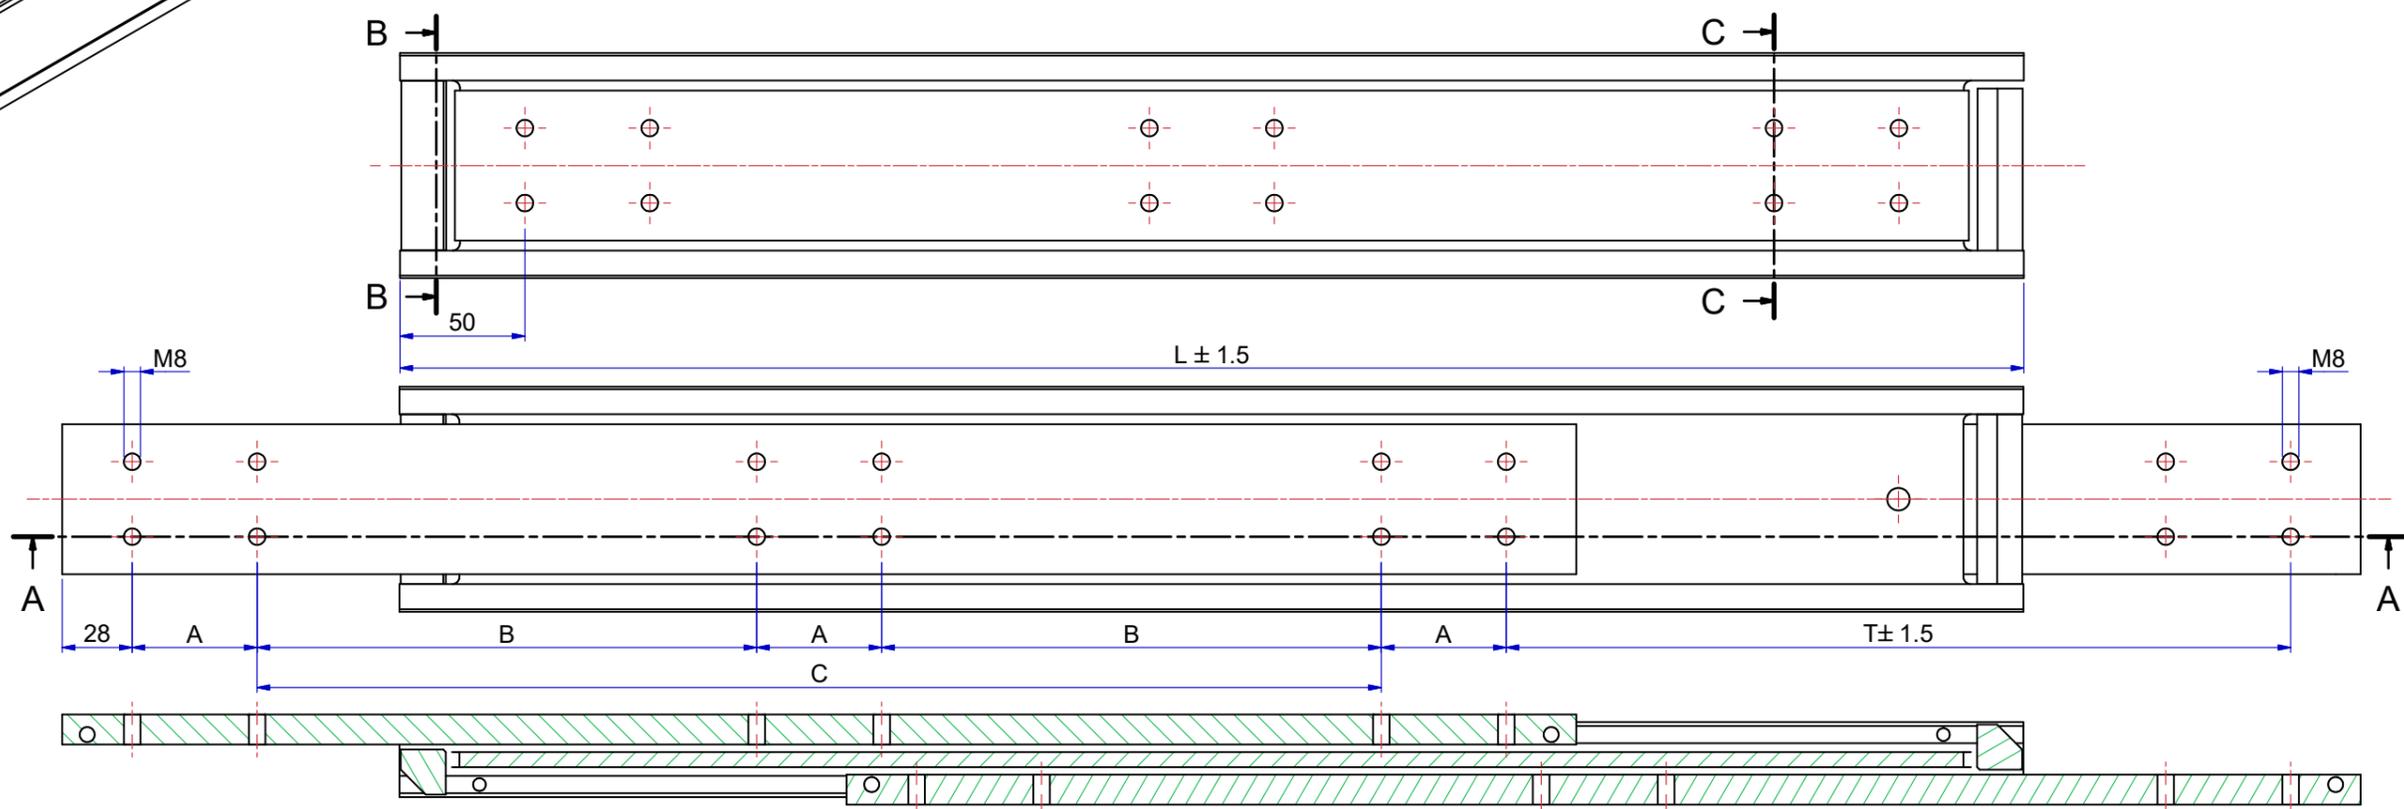

The load capacities are based on a 1% deflection test based on a simulation model (Finite Element Analysis)  
 Load capacity in practice always depends on mounting use and other external factors that can influence this.  
 Tolerance ±0,5mm measured from reference point.

Designer M. Urlings	Gen.Tol.Dim. ± 0.5	Third angle projection	Material	
Date 19-4-2021	Gen.Tol.Angle ± 0.5		Treatment	
Approver	Gen.Roughness Ra		Draw type Fabrication	Doc.No. E000147312
Date	Units mm/deg.		Scale 1 : 2	Type
Description <b>SUPREME TR9036 - (36) BILEX</b>				
Format A2			Item No. 13890SxxB	Released for Production
© THOMAS REGOUT INTERNATIONAL BV, Industrieweg 40, 6219 NR, Maastricht, The Netherlands, +31 (0)43 351 66 66		All rights are reserved.		

Rev	Date	Description	Designer
01	25-4-2023	REVISED MODEL AND TABLE.	R.G